


VLF-200CMF in Cabinet with Motorized Top


0 - 200 kVac peak Sinusoidal Output, 0.1 Hz @ 0.75 μ F – 0.02 Hz @ 3.75 μ F



Side view showing HV tank & Regulator sections
Battery & ground cable reel with 30' (10 m) #2 AWG

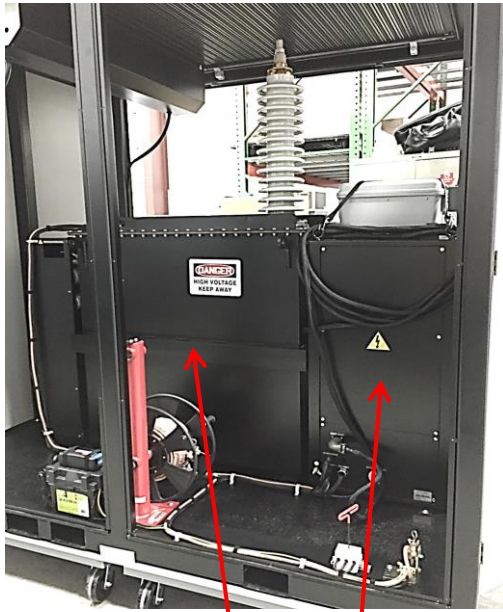

Battery used to operate motorized opening
top for HV output connections

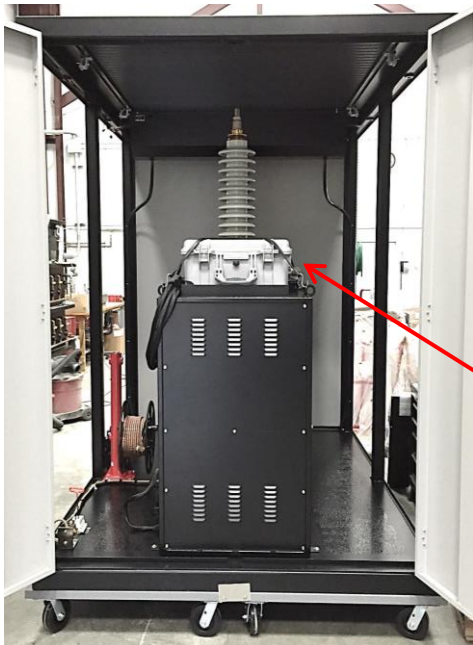

Removable field controller shown
Casters shown not included

Physical Specifications

Size: 78" d x 100" w x 98" h
1981 x 2540 x 2500 mm

Weight: 7,650 lbs. (3470 kg)



Field controller with 30'
(10 m) interconnect cable



The standard configuration